


Palniki olejowe

Gwarancja najkorzystniejszej ceny

Model	Moc	Zasilanie	Moc silnika	wymiary opakowania	waga
	kW		kW	mm	kg
OB-12	60 - 130	230V 50Hz	0,13	420 x 315 x H 313	10,5
OB-15	83 - 166	230V 50Hz	0,2	525 x 375 x H 365	12
OB-20	118.6 - 261	230V 50Hz	0,2	525 x 375 x H 365	12
OB-30	190 - 310	230V 50Hz	0,25	525 x 375 x H 365	12,5

12 miesięcy gwarancji

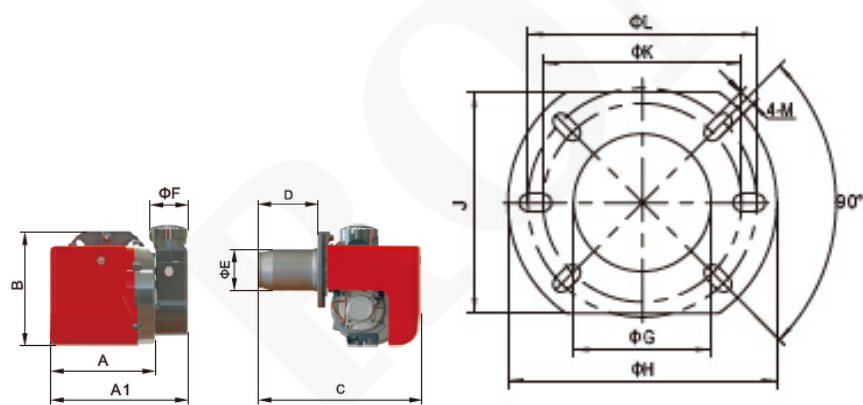

Model	A	A1	B	C	D	E	G	H	J	K	L	M
	mm	mm	mm	mm	mm	Φmm	Φmm	Φmm	mm	Φmm	Φmm	M
OB-12	243	310	246	338	250	97	107	194	166	140	168	4-M8
OB-15	243	310	246	338	250	97	107	194	166	140	168	4-M8
OB-20	243	310	246	338	250	97	107	194	166	140	168	4-M8
OB-30	243	310	246	338	250	97	107	194	166	140	168	4-M8

Characteristics

1. Powered by light fuel oil
2. Single-stage burner (on / off)
3. High pressure fuel atomization with nozzle.
4. Possibility of obtaining optimal combustion conditions thanks to air regulation and the head
5. No need to remove the entire flange for maintenance, the burner can be easily disassembled.
6. Manual flow adjustment
7. One flange and one insulating pad for connection to the exchanger
8. Air inlet manually adjustable with a deflector
9. Adjustable tube includes stainless steel nozzle and steel deflector
10. Single-phase motor powering the pump and blower
11. Flame detector - photoresist
12. Degree of protection IP 40
13. Quiet air intake
14. Plastic housing

[Olejový hořák - OB-12](#)

Kod: 886

ceník

1730.93 PLN

{netto}

2129.04 PLN

{brutto}

Produkt byl přidán do košíku!

[Pokračovat v nákupu](#) [Přejít do košíku](#)