


Vodorovné osy

X-axis

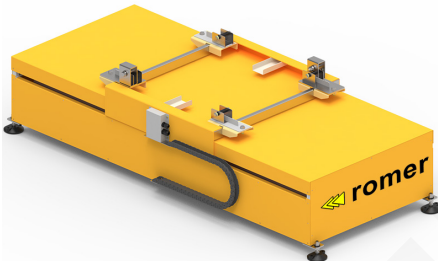

cables X-axis for manipulators programmed using the PLC

controller Low maintenance and operating costs

The axis is controlled externally via the ModBus protocol using RJ45

It is characterized by fast travel speeds of 0.2 - 0.4m/s and high precision thanks to the servo-mechanism

Acceleration 0.1 - 1.5m/s²

	MX-100	MX-150
Jump	1000mm	1500mm
Matching manipulator	MA1, MA2	
Minimum travel speed	5cm/s	
Maximum travel speed	25cm/s	
Installed power	0.75kW	
Security class	IP54	
Ambient temperature	0 - 45°C	
Volume	<70dB(A)	
Connection	P1, P2, P3, N, PE 380-420V 50-60Hz	